


Packaging requirements for the underground waste disposal plant Herfa-Neurode



Date: 11/2019

Steel drum container unit

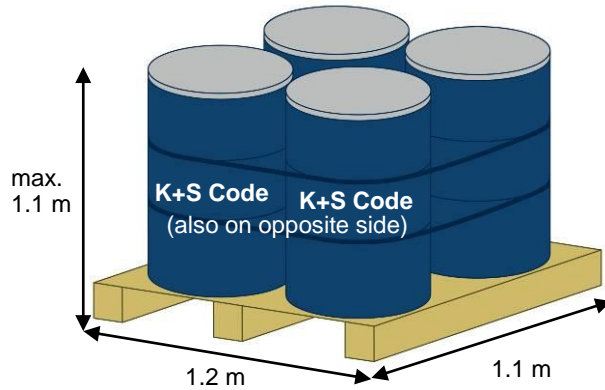

All pallets and drums containers need to be undamaged and clean on the outside, the drums tightly sealed.

<p>Drum container unit</p> <ul style="list-style-type: none"> - steel drums are accepted as so-called drum container units only - a drum container unit generally consists of 4 equally dimensioned steel drums, resting on one pallet - total height incl. pallet max. 1.1 m 	<p>Labelling</p> <ul style="list-style-type: none"> - durable labelling with 'K+S-code' (no sticker) - on each drum - height min. 10 cm - visible on the side that is picked up by the fork-lift (not on the lid) - if applicable marking in accordance with ADR and GefStoffV
<p>Safeguarding the unit</p> <ul style="list-style-type: none"> - 2 steel strips or plastic strips with equal breaking load (other types of strips on request) - each min. 25 mm wide 	<p>Drums</p> <ul style="list-style-type: none"> - 4 equally dimensioned 200-litre steel drums - type-approved in accordance with ADR - drums lined with a 0.2 mm-thick, tightly sealed PE-bag (possible exception: hot-filled wastes)
<p>UTD (underground disposal facility)-pallet</p> <ul style="list-style-type: none"> - base area: 1.2 m x 1.1 m - to be picked up by fork-lift on the 1.2 m-length side - closed sheeting 	<p>Drum lids</p> <ul style="list-style-type: none"> - removable - tension ring lock pointing to the outside, and cotter pin - permissible gross weight per drum may not be exceeded